

Processor Interfaces (IMS PoC Client Invitation)				
Wireless Network A	IMS		Wireless Network B	EventStudio System Designer 4.0
User Equipment A	IMS Network A	IMS Network B	User Equipment B	29-Jun-08 11:31 (Page 1)

Push-to-talk over Cellular (PoC) service allows cell phones to be used as walkie-talkies. A group of users in a PoC session can communicate by simply pressing a button and speaking when the phone indicates it is OK to do so. The user releases the button when he or she is done speaking.

When a user begins to speak, the PoC server allocates resources and notifies other users in the PoC session that the user is speaking. The PoC server then delivers the speech packets to all the users in the session.

PoC is resource efficient as it allocates resources only when a user is actually speaking. This makes it suitable for applications where there are long gaps between individual session participants speaking.


This flow covers the case where PoC Client A invites PoC Client B to a Pre-established Session by sending SIP REFER request to PoC Server A.

This sequence diagram was generated with EventStudio System Designer 4.0 (<http://www.EventHelix.com/EventStudio>). Copyright © 2008 EventHelix.com Inc. All Rights Reserved. The EventStudio source files for this document can be downloaded from <http://www.eventhelix.com/call-flow/ims-poc-pre-established.zip>.


IMS Registration and PoC Session Pre-establishment

IMS Registration and PoC Session Pre-establishment (Click here for details)	PoC Client A registers and pre-establishes the PoC session. Click on the action box to see details.
IMS Registration and PoC Session Pre-establishment (Click here for details)	PoC Client B registers and pre-establishes the PoC session. Click on the action box to see details.

Invite Client B to a session with SIP REFER

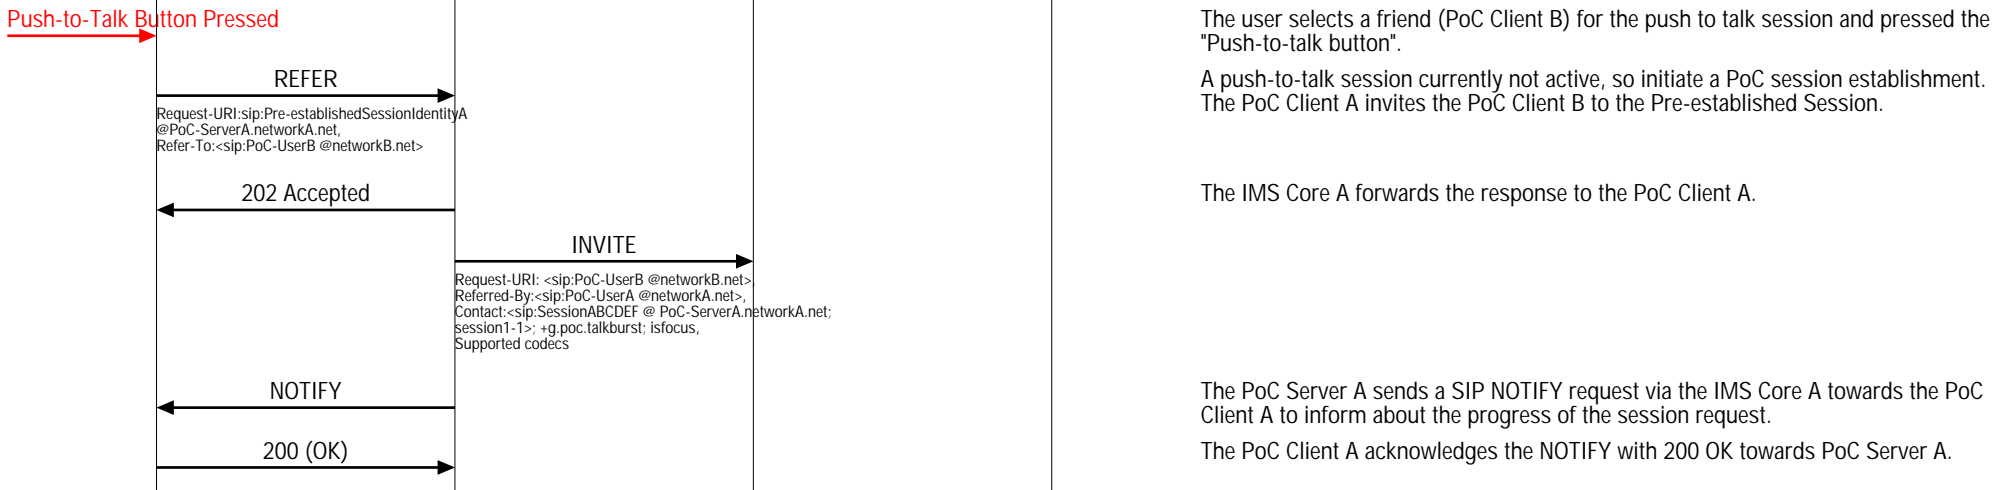


PoC Server A invites PoC Client B

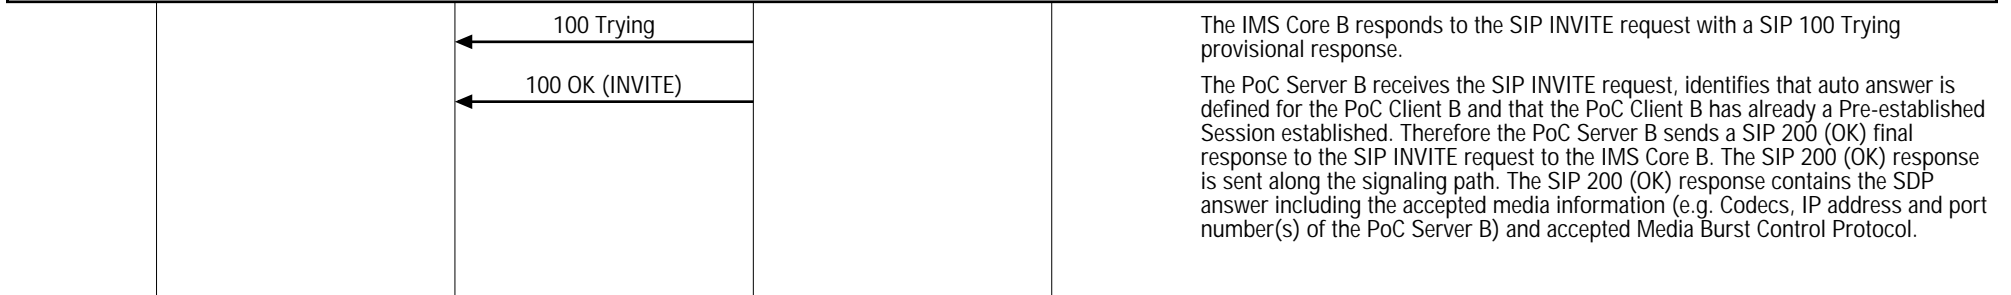



Processor Interfaces (IMS PoC Client Invitation)				
Wireless Network A	IMS		Wireless Network B	EventStudio System Designer 4.0
User Equipment A	IMS Network A	IMS Network B	User Equipment B	29-Jun-08 11:31 (Page 2)

Media Burst Control Protocol (MBCP) Session Setup using RTCP Port

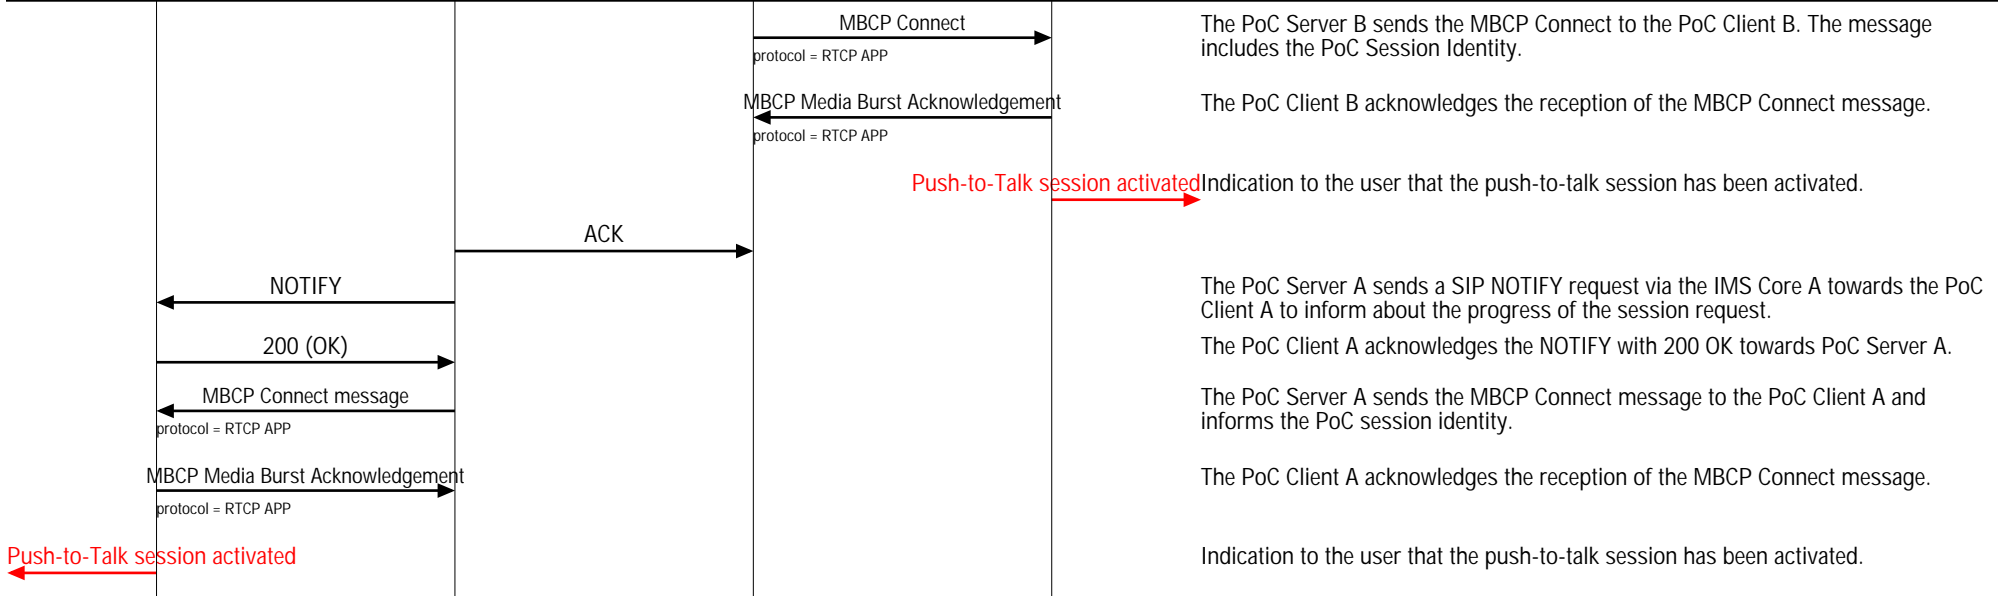

Talk Burst from PoC Client A to B

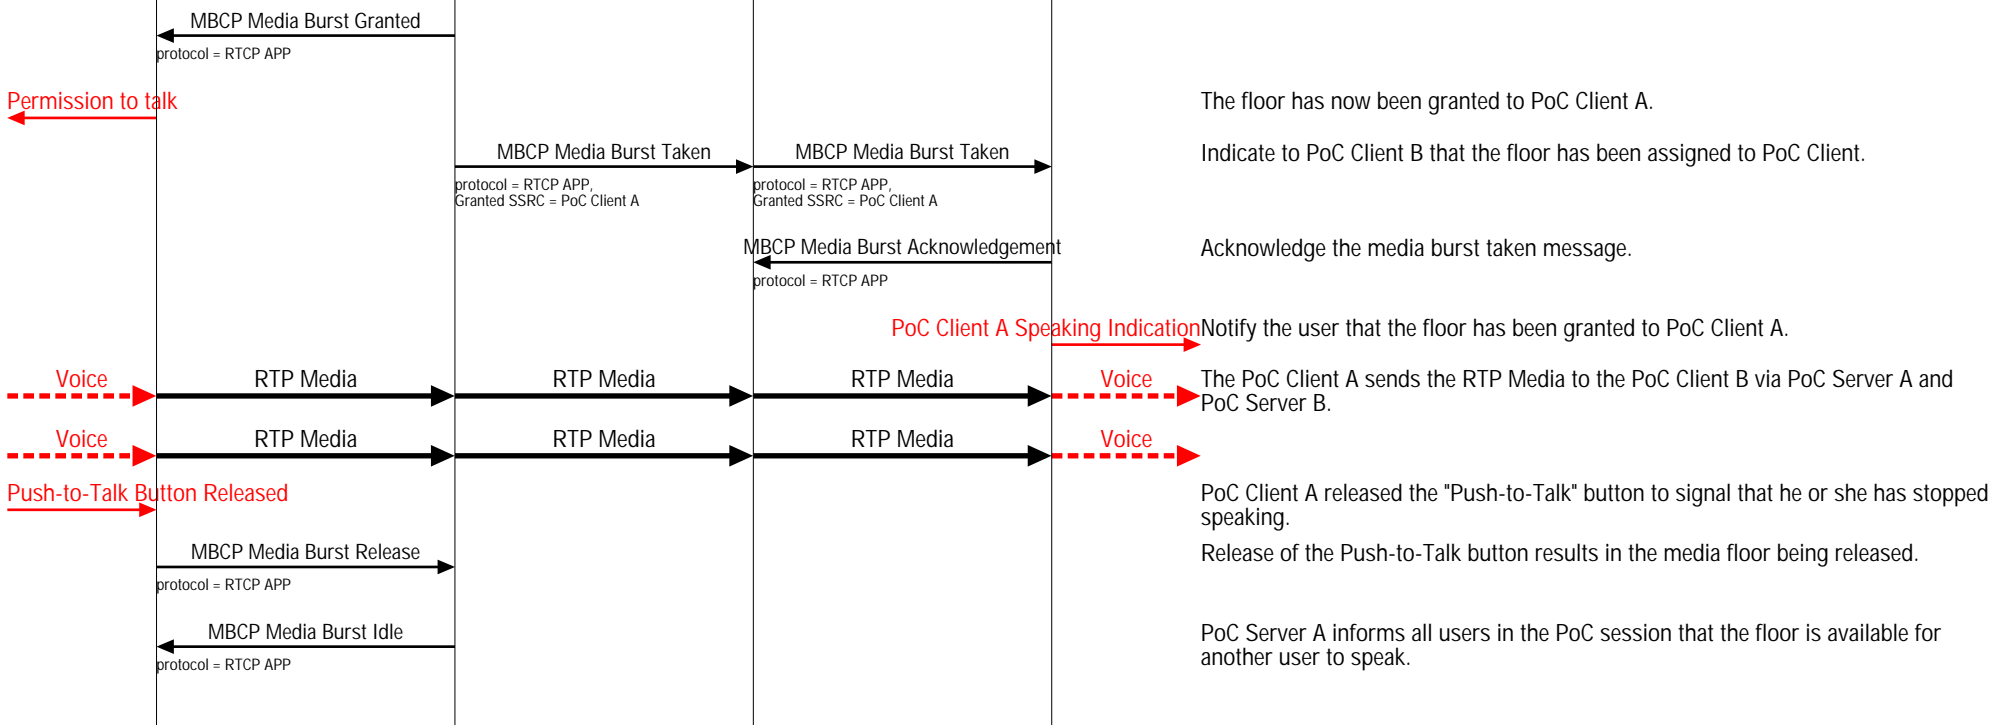

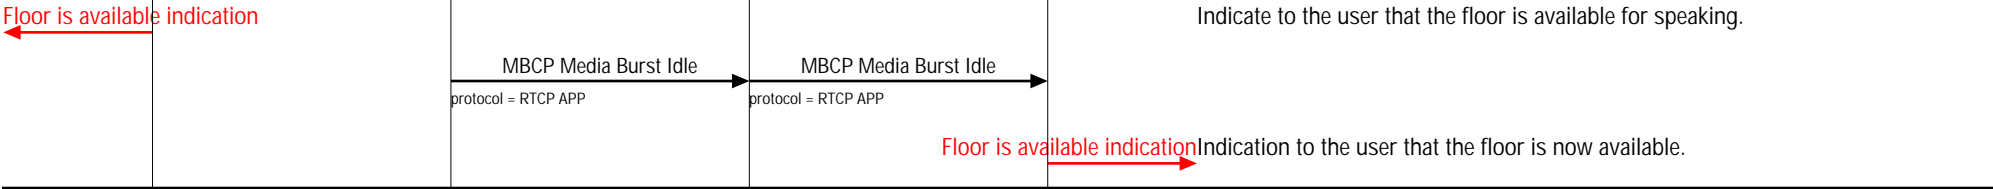

Talk Burst from PoC Client B to A

